


Article No: VMU20110 / 20120

Unifire V20 Nozzle



The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.

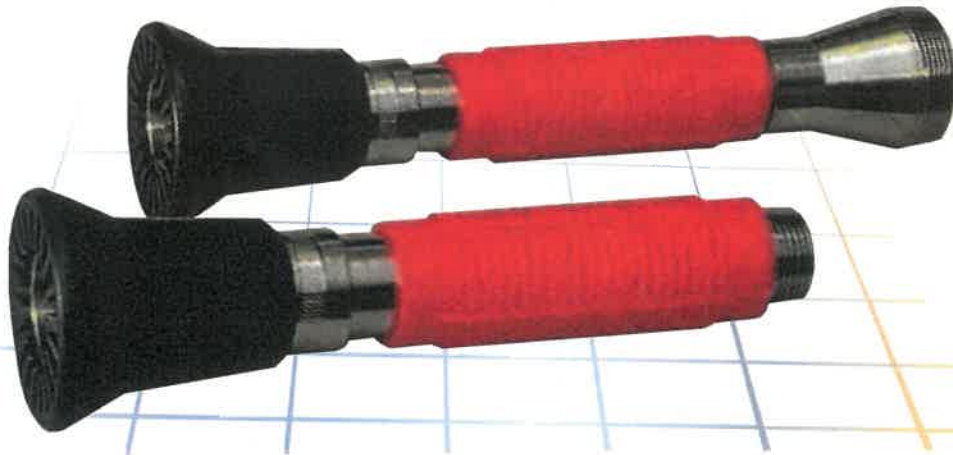

The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare part is the baffle and its screw.

Approvals


Nozzle approved by: Lloyd's & Det Norske Veritas
Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities

Capacities UNIFIRE V20 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	252	27	285	11
6	442	37	480	13
10	576	43	650	16

Article No: VMU16110 / 16120

Unifire V16 Nozzle

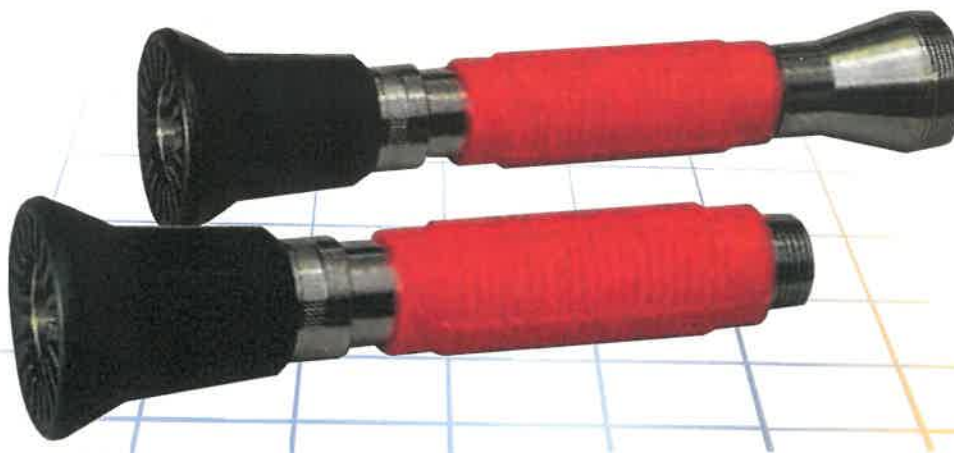

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 10 Bar.

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas

Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities

Capacities UNIFIRE V16 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	205	26	240	10
6	356	34	405	13
10	462	40	550	14

Article No: VMU12110 / 12120

Unifire V12 Nozzle



The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare part is the baffle and its screw.


Approvals

Nozzle approved by: Det Norske Veritas
Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities
Capacities UNIFIRE V12 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	134	22	184	10
6	233	32	325	13
10	302	37	400	14

Article No: VMU10110 / 10120

Unifire V10 Nozzle

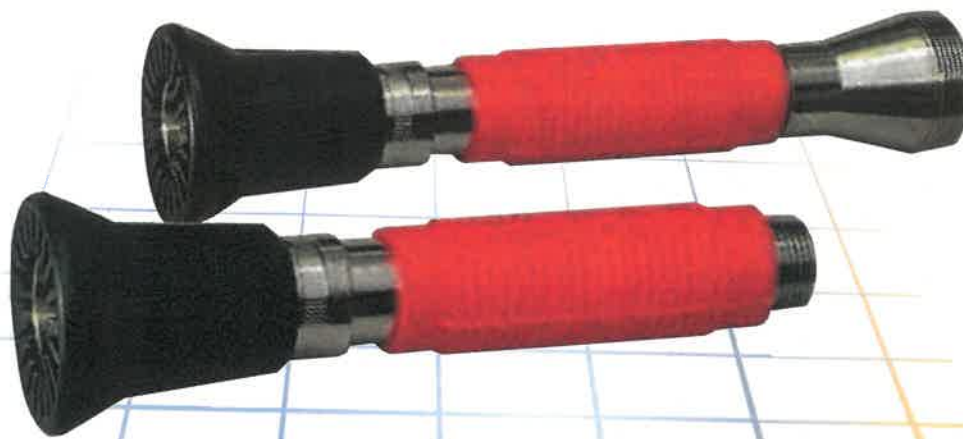

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas
Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities
Capacities UNIFIRE V10 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	95	18	179	10
6	163	31	315	10
10	211	36	365	13