

VERSA SERIES



VS2-9P

SELF-PRIMING 2-STAGE FIRE PUMP

The **WATERAX VS2-9P** is a versatile, rugged, and economical twin impeller self-priming pump. This unit is driven by a **9 HP Honda engine**. It produces a maximum pressure of 150 PSI(10.3 BAR) and flow rate of 105 USGPM (397 L/min). This workhorse can be used as a portable pump or on a slip-on unit. Their compact design makes them ideal for a variety of applications such as firefighting, tank filling and water transfers.


Applications

- Firefighting
- Tank filling
- · High head general water transfer
- Boom spraying
- Irrigation

Features and Benefits

- Twin impeller design provides additional pressure for longer & higher pumping applications.
- Pump casing and diffusers manufactured from quality corrosion resistant grade aluminum for long life.
- Nylon glassfiber reinforced impellers fully corrosion proof and lightweight.
- · 3-way discharge port for easyinstallation.
- · Powder coated casing for added corrosion resistance.
- Self-priming for more versatile installation options.
- · Easyto accessdrain port.
- · Low oil protection.
- · Comprehensive user and service manuals
- EPACertified.



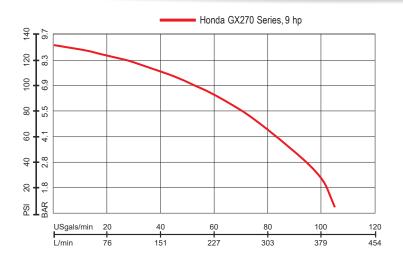

Flow rate at specified pressure

Maximum Pressure:150 PSI(10.3 bar) Freeflow: 105 US gals/min (397 L/min)

Maximum Head: 347' (106 m)

Flow	Rate		Pres	sure
US GPM	(LPM)		PSI	(BAR)
92	(348)	@	50	(3.4)
80	(303)	@	75	(5.2)
64	(242)	@	100	(6.9)

Honda GX270 Series, 9 hp



Pump Specifications:

Type: 2-stage Self-Priming Centrifugal Pump

Maximum Allowable Pressure: 190 PSI (13.1 bar)

Intake: 2" Male NPTThread (Other connector options available)

Discharge: Manifold: (2) 1" Male NPTand (1) 1.5" NPTports with hard anodized aluminum caps

Priming Port: 2" Male BSPwith hard anodized aluminum cap

Body & Diffusers: Anodized corrosive resistant aluminum

Impellers: 6.28 inches (160 mm) Diameter; Reinforced glassfiber nylon composite.

Wear Rings: Reinforced glassfiber nylon composite; replaceable.

Pump Shaft: Extension off engine drive shaft.

Pump Seal: Maintenance Free; Mechanical Type.

Drive Unit: Engine, Direct drive off engine PTOshaft.

Color: Red Powder Coat

Engine Specifications:

Model & Type: Honda GX270 Series,4-stroke horizontal shaft, OHV, air cooled gasoline

 Net Power Output:
 8.5 HP (6.3 kW) @3,600 RPM

 Net Torque:
 14.1 lb-ft (19.1 Nm) @2,500 RPM

 Bore & Stroke:
 3.03 x 2.28 inches (77 x 58 mm)

 Displacement:
 16.48 cubic inches (270 cc)

Starting System: Manual; Recoil

Ignition: Digital CDI with variable ignition timing

Governor: Centrifugal Mass Type

Cooling: Air Cooled Lubrication: Oil, Splash

Oil Capacity: 1.16 quarts (1.1 liters)

Emissions: Meets current CARB, EPA, and CE requirements.

Fuel Type: Gasoline [unleaded, 86 minimum octane, 10% maximum ethanol]

Integrated Fuel Tank Option: 5.6 USquarts (5.3 liters) with manual shut off valve Muffler: Canister type with forestry approved spark arrestor

Frame Specifications:

Carry Handle: Light weight carry handle.

Base: Front foot support with two rear anti-slip, anti-vibration heavyduty rubber feet.

Controls:

Engine supplied controls: Engine Choke Lever, Throttle Lever, Fuel Valve Lever, and On/Off Switch.

All features are not available on every model. Pleaserefer to the product selection matrix to select the proper model.



Pi	RODUCT SELI	ECTION MATRIX	VERSA-6 Portable	VERSA-9 Portable	VERSA-9 Vehicle Mount
			VS2-6P	VS2-9P	VS2-9EV
- (0	Frame	Carry Handle	S	S	-
ARD	FastWire CTRL Cable	Honda GX2703' CTRLCable Ext. w/ terminals & 8 pin connector	-	-	S
ANDARD LUSIONS	Discharge Caps	Cap 1" NPSH	S	S	-
STA	Discharge Caps	Cap 1-1/2" NPSH	S	S	-
o, =	Dry Weight		57 lbs (25.9 kg)	79 lbs (35.6 kg)	84 lbs (37.9 kg)

Standard s Option o Not Applicable -

OPTIONS & ACCESSORIES

Sold Separately

Controls



PMSCP
Panel Mount Standard Control Panel
w/ FastWire CTRLconnector.



MCP
Mini Control Panel
w/ FastWire CTRLconnector.



WCP
WATERAX Control Panel
W/ FastWire PWR & CTRLconnectors.

Primer Electric Kit Fastwire Cables



GZPRIMERKITGuzzler Hand Primer with hose & valve



BATKIT-20-P Sealed Battery 12V, 20Ah w/ FWP-9PWR cable



WLKIT LEDWork Light w/ 5' harness& toggle switch



FWC-H1-3 Honda GX270 3' CTRL Cable Ext. w/ terminals & 8 pin connector FWX-3

3' CTRLCable Extension w/ two 8 pin connectors



FWP-20 20' PWRCable with lugs & Anderson conn. FWP-9

9' PWRCable w/ lugs & Anderson conn. FWP-3

3' PWRCable w/ lugs & Anderson conn.

Pump Intake & Discharge Adapters



A-2688 ADP-A-FM20SV ADP-A-FM15SN ADP-A-FM15S ADP-A-FM15SV ADP-A-C10S ADP-A-C15S

Adapter 2" NPSHFemale to NPSHMale Adapter 2" NPSHFemale to Victaulic Adapter 1-1/2" NPSHFemale to NH Male Adapter 1-1/2" NPSHFemale to NPSHMale Adapter 1-1/2" NPSHFemale to Victaulic Cap 1" NPSH


Cap 1" NPSH Cap 1-1/2" NPSH




VS2-9P

Length 22" (55.8 cm) Width 18" (45.7 cm) Height 19" (48.2 cm) Weight 84 lbs (38 kg)









6635 Henri-Bourassa O.
Montreal, QC. H4R 1E1
TF 855-616-1818
T 514-637-1818
F 514-637-3985
info@waterax.com
www.waterax.com

Distributed By



info@brissmans.se Tel: 035-17 17 90 Skyttevägen 43 302 44 Halmstad www.brissmans.se

All information contained in this document including drawings is proprietary to WATERAX and may not be copied, reproduced or used in whole or in part without our prior written permission.

The information in this document is subject to change without notice. Model displayed with multiple options. Weight and dimensions are approximated and may vary depending on options.